

FURNACE

STATIC ESTATICOS STATICO


SLIM

STATIC MELTING FURNACE **SLIM**, MADE OF COMPACT REFRACTORY MATERIAL PROTECTED WITH STRONG METAL CONSTRUCTION



HORNO ESTÁTICO DE FUSIÓN SLIM FABRICADO CON REFRACTARIO COMPACTO, PROTEGIDO POR CARPINTERÍA METÁLICA

FORNO FUSORIO STATICO **SLIM** REALIZZATO IN REFRATTARIO COMPATTO, PROTETTO DA CARPENTERIA METALLICA

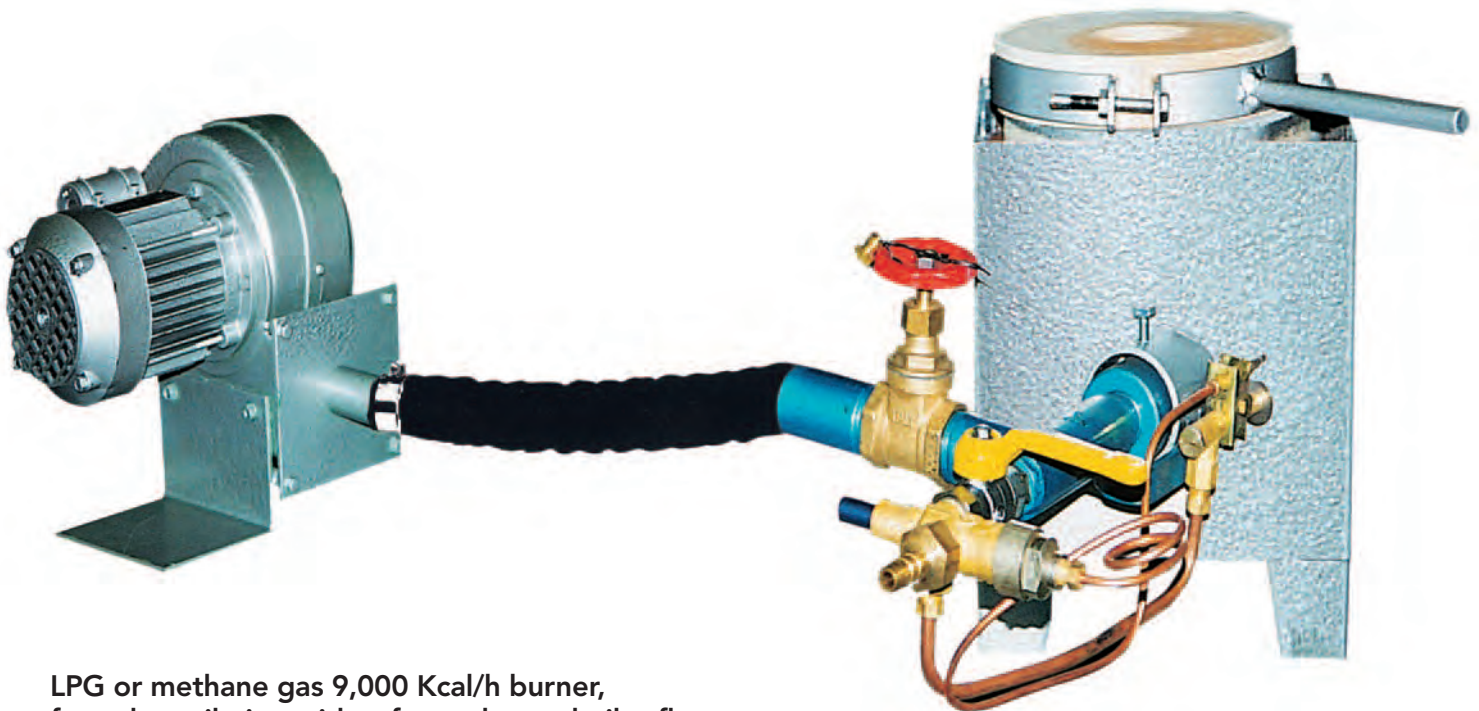

LPG or methane gas 9,000 Kcal/h burner, forced ventilation with safety valve and pilot flame

Quemador 9.000 Kcal/h de gas liquido o gas metano, ventilación forzada con válvula de seguridad y llama piloto

Bruciatore 9.000 Kcal/h a gas liquido o gas metano, aria forzata completo di valvola di sicurezza e fiamma pilota

3-phase or 1-phase electric fan
Electroventilador trifásico o monofásico

Elettroventola Monofase o Trifase

FURNACE	INTERIOR SIZE (mm) Ø x H	OVERALL SIZE (mm) Ø x H	CRUCIBLE	MAX CAPACITY CRUCIBLE (bronze)	MAX CONSUMPTION	POWER (Kcal/h)	
SLIM FF.02	120 x 130	200 x 230	Karbux A 2	kg. 2,0	GPL Methane kg. 0,7/h m ³ 1/h	9000	10

www.fossati.com